

# USER GUIDE





Thank you for purchasing a Danew product. Before using the device, read carefully the operation instructions presented in this manual. It aims at familiarizing you with the technical features of your KONNECT 201 in order to make operation easier.

NOTE : All information presented in this manual and on the box were current at the time of printing. However, as we are permanently enhancing our products through software updates, this manual and the box might not present all the functions of your actual product.

Pictures are for illustration purpose only and are not contract-binding.



# KONNECT 201

# CONTENTS

P.6

## 1 - INTRODUCTION

P.6

Features

P.7

Buttons & Device parts

P.8

## 2 - MESSAGING

P.8

Writing message

P.9

Message setting

P.10

SMS setting

P.10

## 3 - CALL HISTORY

P.11

SIM 1 & SIM 2 call history

P.12

## 4 - PHONEBOOK

P.12

Setting

P.13

## 5 - SETTING

P.13

SIM setting

P.13

Network setup

P.14

Security setup

P.14

Call setting

P.16

## 6 - MULTIMEDIA

- P.16 Camera
- P.16 Audio Player
- P.16 Video Player
- P.17 Image viewer
- P.18 FM Radio

P.18

## 7 - FILE MANAGER

P.18

## 8 - SERVICE

- P.18 WAP

P.20


## 9 - LEGAL INFORMATION

# INTRODUCTION

## FEATURES

|               |                            |
|---------------|----------------------------|
| Screen        | 1.77" TFT                  |
| Resolution    | 128 x 160 px               |
| Processor     | Spreadtrum 6531            |
| Network       | GSM 850/900/1800/1900 Mhz  |
| Bluetooth     | 2.0                        |
| Camera        | 0.08Mpx                    |
| Battery       | 1000 mAh                   |
| Speaker       | 1W                         |
| Connectors    | 3.5 mm line out/ Micro USB |
| Micro SD slot | Up to 16GB                 |
| Dimensions    | 47.5 x 109.9 x 14.3 mm     |
| Weight        | 68 g                       |

## BUTTONS & DEVICE PARTS

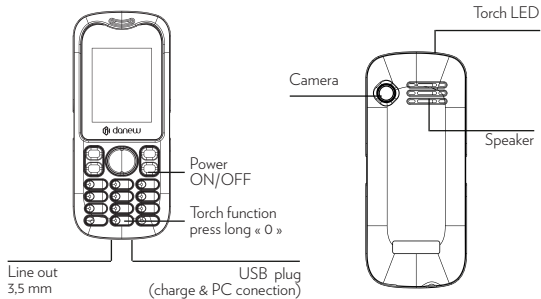

You can receive and send message and can also use broadcast message. Message make it possible for you to exchange message With other wireless phone users. Select Message to perform operation.

## 2.1 WRITTING MESSAGE

You can write a new text message send to others, and also can insert template in the message. Select the Option after editing a text message

|               |                                                        |
|---------------|--------------------------------------------------------|
| Send          | send the message only                                  |
| Save and Send | send the message while sending                         |
| Save          | save the message                                       |
| Send to many  | send the message to many                               |
| Send by group | send the message to all the link of the selected group |

## 2.2 MESSAGE SETTING

You can setup your MMS through the menu by your need as following:

|                |                                                                                                             |
|----------------|-------------------------------------------------------------------------------------------------------------|
| Server Profile | Start or edit the service, when you fail to send the MMS please change online-pattern of the server to WAP. |
| Send           | Include life, send return, read return, priority etc.                                                       |
| Retrieve       | Include main network, roaming network, Send return, allow to sending reports etc.                           |
| Memory status  | View the storage of the MMS                                                                                 |

Note : If you fail to send MMS, please change the online-pattern to WAP in the server setting.

## 2.3 SMS SETTING

You can setup the message from the menu, as following:

|                   |                                                                                            |
|-------------------|--------------------------------------------------------------------------------------------|
| SIM Setting       | Offer you four profiles and you can edit their names, set SC Address and Valid Period etc. |
| Common Setting    | Set delivery report on or off                                                              |
| Memory Status     | Check the capacity of message storage                                                      |
| Preferred Storage | Set the default message storage location, including phone storage and SIM card.            |

Note : You need support from the service provider to receiver delivery reports.

### 3

## CALL HISTORY

Enter the main menu Log, select SIM1 or SIM2 to view the dialed calls and answered calls, can also examine the call time, cost and the use of the message.

## 3.1 SIM 1 & 2CALL HISTORY

You phone keeps lists of incoming and outgoing calls, even for calls that didn't connect .The most recent calls are listed first.

**TIP :** The phone keeps the only latest call of the same number .To view detail information or performs other operation: Find the lists of Dialed Calls, Received Calls, Missed Calls .Press ok key to view the detail information: times etc.

Press Option key to perform following operation:

|          |                                                                       |
|----------|-----------------------------------------------------------------------|
| Delete   | Delete this record                                                    |
| Save     | Save the number of this record to phone book                          |
| Calll    | Call the number of this record                                        |
| Send SMS | Send message to the number of the item                                |
| Edit     | Enter the number edit screen, you can modify, save or dial the number |

## 4

## PHONEBOOK

Select contacts to open phone book. It is consisting of phone storage and SIM card storage

|                     |                                                                                                                          |
|---------------------|--------------------------------------------------------------------------------------------------------------------------|
| Phone Storage       | With a name, default number, family number, company name, email address, company number, fax number, birthday date, etc. |
| Stockage sur la SIM | The capacity depends your SIM card type and there is only a name and one business number in each item .                  |

Tip : Delete the selected names one by one.

## 4.1 SETTING

You can perform bellowing operations on the phonebook :

|                   |                                                                                                |
|-------------------|------------------------------------------------------------------------------------------------|
| Memory Status     | Check the capacity of the phonebook, Including SIM card memory and phone memory.               |
| Preferred Storage | Select SIM card memory or phone Memory as the default storage location when adding a new name. |

You can set your favorite wallpaper, ring or some other function.

## 5.1 SIM SETTING

Enter this menu; you can set the mode to be Dual SIM, only SIM1, only SIM2, flight mode.

## 5.2 NETWORK SETUP

When dual SIM mode is activated, you can perform network setup for SIM1 and SIM2 separately. Enter Network Settings, select Network Setup and then you can perform following operations:

|                |                                            |
|----------------|--------------------------------------------|
| Network        | New search, Select Network                 |
| Selection      | Selection Mode                             |
| Preferences    | Set the preferred network during searching |
| Band selection | Set the way how GPRS is connected          |

## 5.3 SECURITY SETUP

Enter Security Settings, select Security Setup and then you can perform following operation:

|                 |                                                                        |
|-----------------|------------------------------------------------------------------------|
| SIM Lock        | Set a password for your SIM card-open/close                            |
| Phone Lock      | Set a password for phone lock. (default 1234)                          |
| Keypad Lock     | auto keypad lock on or off and a time after which the keypad is Locked |
| Change Password | Change the Pin Password, Pin2 Password and Phone Lock Password         |

Note : For Pin Password, please contact your service provider.

## 5.4 CALL SETTING

Enter call Setting form main menu, select Call Setup and then you can perform some operations as following:

|                    |                                                                                                                                                                                        |
|--------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Call Waiting       | Setup the call waiting function                                                                                                                                                        |
| Call Divert        | Setup the call diverts function                                                                                                                                                        |
| Call Limit         | Setup the call limit function                                                                                                                                                          |
| Line switch        | Switch your current line and there are 2lines available                                                                                                                                |
| Call time reminder | Set the call time reminder on or off and its type and period                                                                                                                           |
| Call time Display  | Set if call time shows during calls or not                                                                                                                                             |
| Auto Redial        | Set Auto Dial on or off. While it is on, the phone automatically redials 10 times in occasion that the line is busy or cannot be answered and you can press Abort to cancel redialing. |
| Backlist           | Set 5 numbers, while it is on, the phone automatically shields the incoming calls from the members in blacklist.                                                                       |
| IP Dial            | Set IP dial on or off, edit IP number                                                                                                                                                  |

Your phone offers multimedia applications and you can select Media from main menu to open it.

## 6.1 CAMERA

Your phone has a hi-Mega pixel camera that you can take photos whenever and wherever you like. After taking photos, store them in the phone memory or memory card (if any).

|                |                                                                                   |
|----------------|-----------------------------------------------------------------------------------|
| Camera Setting | Press left soft key to open Option in viewfinder display and make detail setting. |
|----------------|-----------------------------------------------------------------------------------|

## 6.2 AUDIO PLAYER

You can use the audio player to broadcast music. Press OK key to play the current music, and press it again to pause the current music. Press the Left direction key to switch to the before, and right direction key to switch to the next. You can adjust the volume of the MP3 player through the upper direction key and down direction key.

## 6.3 VIDEO PLAYER

Tap Video Player to open it and view all video files. Press the Options and perform following operations on the selected video (play forward, details, rename, delete, delete all files or sort. During

playing, press the 4-way navigation key up-' and down to adjust the speed, press the left or right key to contrib. playing rate, press « 0 » to full screen, press « # » to control volume.

## 6.4 IMAGE VIEWER

You can perform the following operations:

|            |                                                                                           |
|------------|-------------------------------------------------------------------------------------------|
| View       | View photos                                                                               |
| Forward    | Send the current photo to wallpaper list, screen saver list and power on/off display list |
| Rename     | Change name of the photo                                                                  |
| Delete     | Delete the photo                                                                          |
| Delete All | Delete all photos                                                                         |
| Files Sort | Arrange the photos by name, type, time,. size or random                                   |
| Storage    | Choose photos in the phone memory or memory card                                          |

## 6.5 FM RADIO

Choose Radio menu to turn the radio function.

Note : While tuning the radio in, you can dial or hear the call normally. When on the phone, the volume of the radio will become silence automatically

## 7

## FILE MANAGER

Tap from the main menu to open it and you can find the storage devices and the capacity of total space and free space. On different objects, there are different operations.

## 8

## SERVICES

### 8.1 WAP

Your phone supports service subject to WAP .You can access the service provided by network service operator. You can acquire the information about news, weather forecast, flight, etc.

Notice : GPRS service needs the support of network. You can enjoy it in the coverage areas of GPRS network.

|               |                                                                                                                                               |
|---------------|-----------------------------------------------------------------------------------------------------------------------------------------------|
| Homepage      | Access the Home page. Home page is your preset website of WAP<br>If you do not set the Home Page, your phone will access the default website. |
| Favorites     | View the bookmarks. You can select one of them to access the website.                                                                         |
| Recent Visits | The option will record the web addresses you viewed before                                                                                    |
| Offline page  | The option will view the web addresses offline.                                                                                               |
| Input URL     | This function for the input you want to connect the web site                                                                                  |
| Settings      | Some settings of surfing the Internet                                                                                                         |

## EUROPEAN UNION DIRECTIVES CONFORMANCE STATEMENT

Hereby, Danew declares that this product is in compliance with:

The essential requirements and other relevant provisions of Directive 1999/5/EC

**C € 2200 !**

## SUPPORT & WARRANTY\*

For firmware updates, please visit our website [www.danew.com](http://www.danew.com) and the Support and Drivers & Manuals section. Visit the website [www.danew.com](http://www.danew.com) the Product registration section.

For customer service requests, you should first contact the technical support in order to get the Return Merchandise Authorization RMA number. Returns without RMA number previously obtained will not be accepted. Danew reserves the right to verify that device malfunction is not a result of improper use or manipulation by the user.

### TECHNICAL SUPPORT

0899 782 278 (France),

Our technical support team will answer your questions from :

- Monday to Thursday, from 9h00 to 13h00, from 14h00 to 18h
- Friday from 9h00 to 13h00, from 14h00 to 17h.

*\*Product with 1 year warranty and accessories with 1 month warranty starting from the purchase date.*

## **SAR**

### YOUR MOBILE DEVICE MEETS FCC AND IC LIMITS FOR EXPOSURE TO RADIO WAVES.

Your mobile device is a radio transmitter and receiver. It is designed not to exceed the limits for exposure to radio waves (radio frequency electromagnetic fields) adopted by the Federal Communications Commission (FCC) and Industry Canada (IC). These limits include a substantial safety margin designed to assure the safety of all persons, regardless of age and health.

The radio wave exposure guidelines use a unit of measurement known as the Specific Absorption Rate, or SAR. The SAR limit for mobile devices is 2 W/kg. Tests for SAR are conducted using standard operating positions with the device transmitting at its highest certified power level in all tested frequency bands. The highest SAR values under the FCC and IC guidelines for your device model are listed below:

|                                    |            |
|------------------------------------|------------|
| Highest SAR values for this device |            |
| Head SAR                           | 0,117 W/kg |
| Body SAR                           | 0,313 W/kg |

During use, the actual SAR values for your device are usually well below the values stated. This is because, for purposes of system efficiency and to minimize interference on the network, the operating power of your mobile device is automatically decreased when full power is not needed for the call. The lower the power output of the device, the lower its SAR value.

If you are interested in further reducing your RF exposure then you can easily do so by limiting your usage or simply using a hands-free kit to keep the device away from the head and body.

## Copyright & trademarks

Certain features, services and applications are network-dependent and may not be available in all areas; additional terms, conditions and/or charges may apply. Contact your service provider for details.

All features, functionality and other product specifications, as well as the information contained in this guide, are based upon the latest available information and believed to be accurate at the time of printing. Danew reserves the right to change or modify any information or specifications without notice or obligation.

Note: The images in this guide are examples only.

© 2016 DN Electronics. All rights reserved.

Caution: Danew does not take responsibility for changes/modification to the transceiver.



